



**LX-MU500**  
MULTIMEDIA PROJECTOR

**LX-MW500**  
MULTIMEDIA PROJECTOR

## VERSATILE IN PERFORMANCE READY FOR EVERY NEED

Perfect for any professional settings, Canon LX-MU500 and LX-MW500 DLP Projectors are as dynamic as you are. Featuring 5000 lumens of brightness with BrilliantColor™ system and 6-Axis Colour Adjust, you can look forward to true-to-life projection quality. They are compact in size, with adaptable lens adjustment functions, for incredible flexibility wherever work takes you. Both projectors also include connectivity choices with HDBaseT™ receiver, HDMI and Mobile High-Definition Link (MHL) inputs.



Brightness of  
5000 Lumens



HDBaseT™  
Connectivity




## Brightness of 5000 Lumens

Balancing unrivalled image quality and versatility, the compact LX-MU500 and LX-MW500 are ideal for a range of education and corporate markets.



## HDBaseT™ Connectivity

HDBaseT™ allows uncompressed HD video, audio and control signals to be transmitted over one single Ethernet cable with a maximum distance of 328 feet (100m).

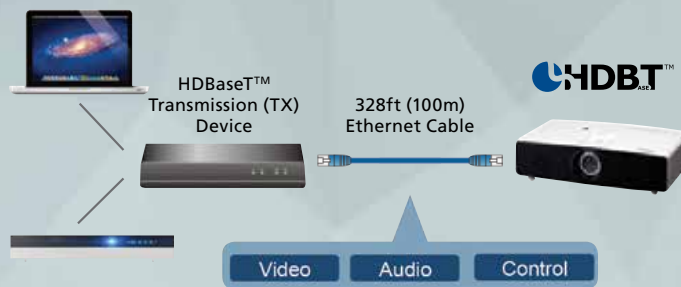

PROJECTOR SPECIFICATIONS			
MODEL NAME	LX-MU500	LX-MW500	
<b>PROJECTION SYSTEM</b>	Imaging Device	DMD x1	
	Aspect Ratio	16:10	
	Native Resolution	WUXGA (1920 x 1200)	WXGA (1280 x 800)
	Brightness	5000 / 4000lm <sup>*2</sup>	
	Uniformity	75%	
	Contrast Ratio	2500:1	3750:1
	Digital Keystone	V: ± 30°, H: ± 30°	
	Lens Shift	V: 52.5% – 55.0% (Manual)	V: 55.0% – 57.5% (Manual)
<b>OPTICS</b>	F Number, Focal Length	F2.45 – F3.07, f=15.75 – 25.1mm	
	Zoom	1.6x	
	Focus	Manual	
	Image Size W	60" ~ 240"	
	Image Size T	60" ~ 150"	
Throw Ratio	1.07 – 1.71:1 <sup>*1</sup>	1.12 – 1.80:1 <sup>*1</sup>	
<b>IMAGE ADJUSTMENTS</b>	Image Modes	Presentation / Standard / sRGB / Movie / DICOM / User 1 / User 2	
	Colour Adjustment	Colour Temperature, Colour Balance, Colour Tint	
	Screen Colour Correction	Light Yellow, Pink, Light Green, Blue, Blackboard	
	Mounting	Front Table, Rear Table, Front Ceiling, Rear Ceiling	
Adjustable Feet	Front: 2 (Angle of Elevation of up to 4.5°)		
<b>IMAGE SIGNALS</b>	Scanning Frequency	V: 24Hz – 119.989Hz, H: 15.73kHz – 101.563kHz	
	Analog PC Input	WUXGA / WSXGA+ / UXGA / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA / MAC	
	Digital PC Input	WUXGA / WSXGA+ / UXGA / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA	
	Component Video Input	1080p / 1080i / 720p / 576p / 576i / 480p / 480i	
	Digital Video Input	1080p / 1080i / 720p / 576p / 480p	
	Dot Clock	162.00MHz	157.50MHz
	MHL Input	1080p / 1080i / 720p / 576p / 576i / 480p / 480i	
	Video Input / S-video Input	NTSC / PAL / SECAM / NTSC4.43 / PAL-M / PAL-N / PAL-60	

PROJECTOR SPECIFICATIONS			
MODEL NAME	LX-MU500	LX-MW500	
<b>TERMINALS</b>	Mini Dsub15	Analog PC / Component Video Input (x2), Analog PC / Component Video Output (x1)	
	HDMI	Digital PC / Digital Video Input	
	HDMI/MHL	Digital PC / Digital Video / MHL Input	
	Mini DIN4	S-video Input	
	RCA x3	Video Input / Audio-L / Audio-R	
	RJ-45 HDBaseT™	Network Connection (100BASE-TX / 10BASE-T) HDBaseT™ Input	
	Dsub9 (Control)	RS-232C	
	USB Type A	Power Out	
	USB Type B	Service Port	
	Mini Jack	Audio Input (x1), Audio Output (x1)	
	<b>REMOTE CONTROL</b>	Wireless Remote	IR
<b>BUILT-IN-SOUND</b>	Internal Amplifier	10W, Monaural	
	Type	Super-High Pressure Lamp	
<b>LAMP</b>	Life	2000H / 2500H (Lamp Mode: Normal / Eco) <sup>*5</sup>	
	Lamp Power	370 / 296W <sup>*2</sup>	
<b>RATINGS</b>	Fan Noise	36 / 33dB <sup>*2</sup>	
	Power Consumption	500 / 400W <sup>*2</sup>	
	Standby Power Consumption	3.0 / 0.5W <sup>*3</sup>	
	Power Voltage	AC100 – 240V : 50 / 60Hz	
	Operating Temperature	0°C – 40°C (RH: 10 – 80%) <sup>*4</sup>	0°C – 40°C (RH: 10 – 90%) <sup>*4</sup>
	Dimensions (W x H x D)	465mm x 123mm x 264mm	
	Weight	5.4kg	

<sup>\*1</sup> Calculated value for 100" image.

<sup>\*2</sup> Lamp Mode is Normal / Eco. Brightness in Eco mode is only a calculated value and is not guaranteed as specification.

<sup>\*3</sup> Stand by LAN function is on / off.

<sup>\*4</sup> Non-condensing.

<sup>\*5</sup> These values do not guarantee the operation life of lamps.

<sup>\*6</sup> This accessory is not pre-installed when the projector is purchased.

## WHAT'S IN THE BOX

- Projector
- Power Cord
- Computer Cable (Mini D-sub 15pin)
- Projector Remote Control: LV-RC08 (Battery Type: CR2025)
- Important Information
- User's Manual (CD-ROM)
- Warranty Card


## ACCESSORIES/REPLACEMENT PARTS

Remote Control LV-RC08

Replacement Lamp LX-LP02

Replacement Air Filter LX-FL02<sup>\*5</sup>

## CONNECTABILITY

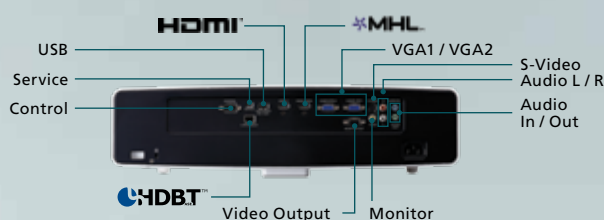

## Canon Offices

**INDIA**  
Canon India Pvt. Ltd.  
Tel: 124-416-0000 Fax: 124-416-0011  
www.canon.co.in

**MALAYSIA**  
Canon Marketing (Malaysia) Sdn. Bhd.  
Tel: 60-3-78446000 Fax: 60-3-78477222  
www.canon.com.my

**SINGAPORE**  
Canon Singapore Pte. Ltd. (Domestic Operations)  
Tel: 65-6799-8888 Fax: 65-6798-8882  
www.canon.com.sg

**THAILAND**  
Canon Marketing (Thailand) Co. Ltd.  
Tel: 02-344-9988 Fax: 02-344-9861  
www.canon.co.th

**VIETNAM**  
Canon Marketing Vietnam Co. Ltd.  
Ho Chi Minh City  
Tel: 848-3820-0466 Fax: 848-3820-0477  
Hanoi  
Tel: 844-37711677 Fax: 844-37711678  
www.canon.com.vn

## Canon Business Partners

**BANGLADESH**  
J.A.N. Associates Ltd.  
Tel: 880-2-9660601 Fax: 880-2-8610410

**BRUNEI**  
Interhouse Company Sdn. Bhd.  
Tel: 673-2-653001 Fax: 673-2-653003

**CAMBODIA**  
I-Click (Cambodia) Pte. Ltd.  
Tel: 855-23-996638 Fax: 855-23-996639

**INDONESIA**  
PT Datascrip  
Canon Call Center  
Tel: 021-2922-6000 Fax: 62-21-6544811 to 13  
www.canon.co.id

**MALDIVES**  
SIMDI Company (Pvt) Ltd.  
Tel: 960-3334421 Fax: 960-3334424

**MYANMAR**  
Myanmar Golden Rock International Co., Ltd.  
Tel: 001-95-1654810 to 654819 Fax: 001-95-1654820

**NEPAL**  
International Electronics Concern (P) Ltd.  
Tel: 977-1-4221991 Fax: 977-1-4421909

**PAKISTAN**  
Shirazi Trading Co. (Pvt) Ltd.  
Tel: 92-21-32417737, 32417746 Fax: 92-21-32417747

**SRI LANKA**  
Metropolitan Office (Pvt) Ltd.  
Tel: 94-114-700-200 Fax: 94-114-700-267

Dealer's Stamp

0202W131

# Canon

**SOUTH & SOUTHEAST ASIA REGIONAL HEADQUARTERS**

**CANON SINGAPORE PTE. LTD.**  
1 Fusionopolis Place,  
#15-10 Galaxis, Singapore 138522

www.canon-asia.com